



Phoenix™ 5 Series SWIR Camera Core

Miniature SWIR Camera Core for More Pixels on Target



The Phoenix™ 5 Series SWIR camera core includes the Phoenix™ VGA5 (640x512) and Phoenix™ HD5 (1280x1024), featuring the industry's smallest SWIR sensor. The Phoenix™ 5 Series captures snapshot SWIR imagery using Attollo Engineering's high-performance InGaAs detector material. The extremely small pixel pitch enables more pixels on target with a short focal length optic. The Phoenix™ 5 Series sensor is designed specifically to support broadband imaging along with day and night laser see-spot and range-gated imaging capabilities. The Phoenix™ 5 Series SWIR camera is built for low SWaP applications and offers a significant opportunity for cost-savings at the system level compared to competing SWIR cameras. This miniature camera is ideal for small gimbal integration as well as use in low-SWaP handheld and soldier-mounted systems.

Highlights

- Industry smallest SWaP SWIR core
- Technology: InGaAs provides uncooled imaging
—0.9 to 1.7 μm wavelength
- Extremely small pixel pitch: 5 μm enables more pixels on target with short focal length optic
- Laser compatible: day and night laser see-spot and range-gated capabilities
- Multiple interfaces: USB-C, MIPI, Camera Link, and Parallel
- Export friendly: US Commerce classification, EAR 6A003.b.4.a

Applications

- Small gimbals and SUAS
- Ground soldier systems
- Laser see-spot
- Machine vision
- Precision agriculture
- Driver Vision Enhancement (DVE)
- Range-gated imaging
- Fire fighting
- Image through environmental obscurants
- Covert illuminated imaging
- Long-range surveillance
- Laser designator imaging and decode*
*When paired with Attollo's Mantis laser event detector module

The Phoenix™ 5 Series camera core is designed and manufactured in Attollo's 34,000 ft² facility in Camarillo, California. Attollo Engineering specializes in sensors that combine infrared and laser imaging as well as standard and custom IDCA designs for your applications. Attollo is a merchant supplier of standard and custom format InGaAs detector arrays, hybridized focal plane arrays, and camera assemblies. Attollo is AS9100 certified.

SYSTEM FEATURES

Phoenix™ 5 Series Phoenix™ VGA5 Phoenix™ HD5

Top Level

Sensor Type	InGaAs	
Sensor Size	640 x 512, 5 μm	1280 x 1024, 5 μm
Spectral Band	0.9 μm - 1.7 μm	
Read Noise	50 e ⁻ /80 e ⁻ (high gain/low gain)	
Max Full Frame Rate	220 Hz	55 Hz

Mechanical

Size (L x W x H)	20.32 mm x 25.25 mm x 25.25 mm	
Weight	32 g (core, no lens)	
Mounting	1-64, 1/4"-20 adapter	
Lens Mount	C-Mount, M16x.075	C-mount

FPA Characteristics

Shutter Mode	Snapshot	
Well Capacity	40 ke ⁻ / 230 ke ⁻	40 ke ⁻ /180 ke ⁻
Readout Mode	Integrate then read	
Integration Time	Presets and user-defined, minimum = 0.1 μs	
Windowing Capable	Yes	
External Sync	Sync-In and Sync-Out	
Operability	> 99.5%	

Video Interface


Parallel (16 bit)	Included
USB-C	With personality board
MIPI	With personality board
Camera Link	With personality board
Image Processing	AEC, NUC, BPR, Histogram Equalization, and AGC

Interfacing

Parallel	HIROSE DF40-50	
Input Voltage	5 V ±10%	
Power Dissipation	1.6 W at 30 Hz, 1.8 W at 60 Hz	1.6 W at 30 Hz, 2.0 W at 60 Hz
Communication	USB, UART, SPI or I2C	
SDK and GUI Available	Yes	

Environmental

Operating Temperature	-40°C to +71°C
Storage Temperature	-50°C to +85°C
Max Altitude	40,000 feet
Humidity	5-95% relative humidity (non-condensing)

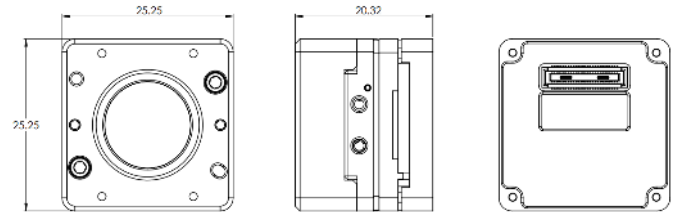

See More



Please scan QR code for more information

Equipment described herein is subject to US export regulations under EAR and may require a license prior to export under ECCN 6A003.b.4.a. Specifications are subject to change without notice. © 2024 Attollo Engineering LLC. All rights reserved. XM000049 R.2025.09.26